



Haier®


SCH BLOCK FOR MSD309B




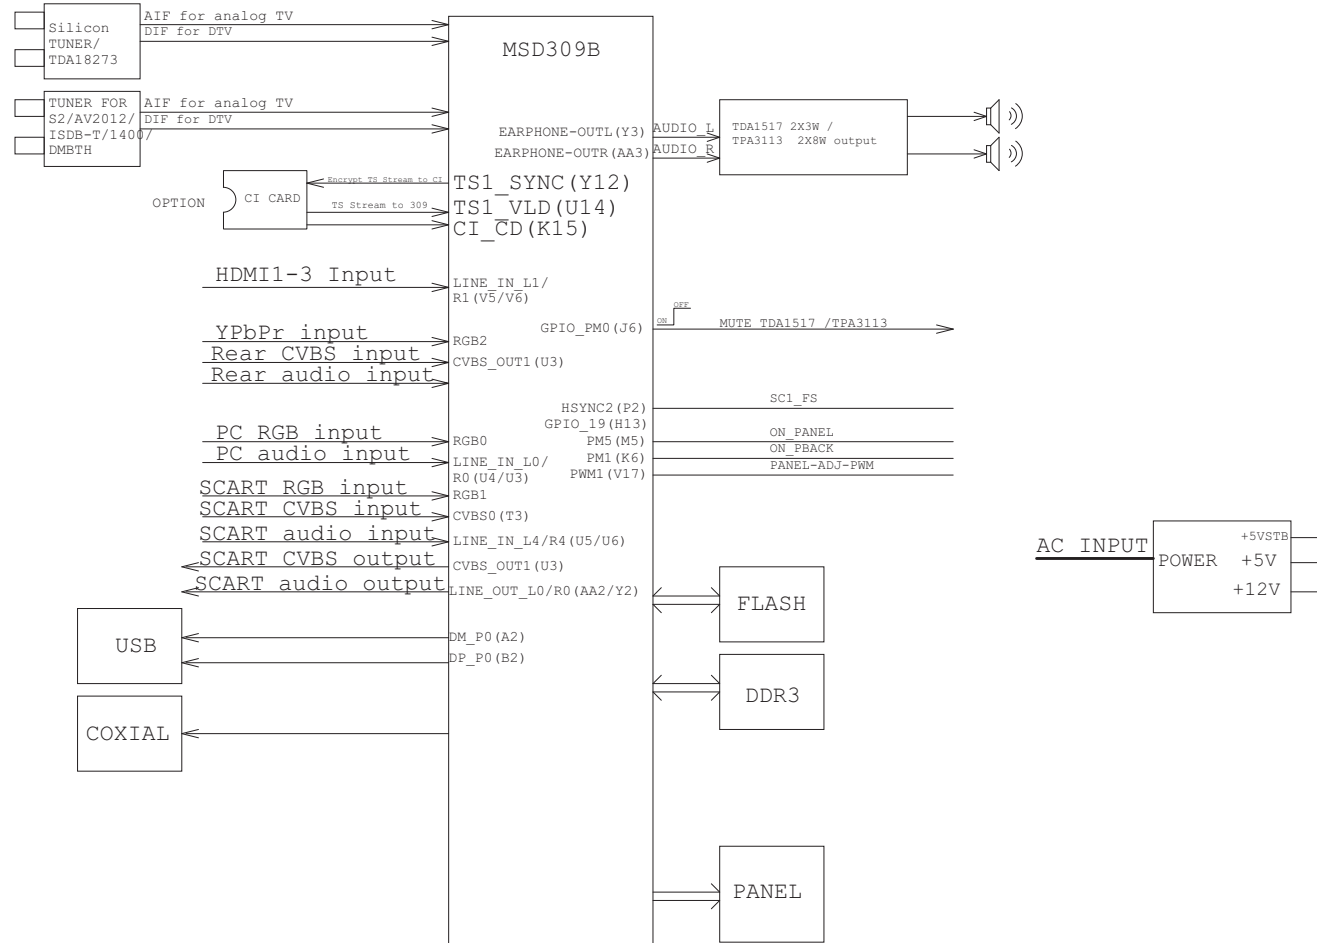


Power Input


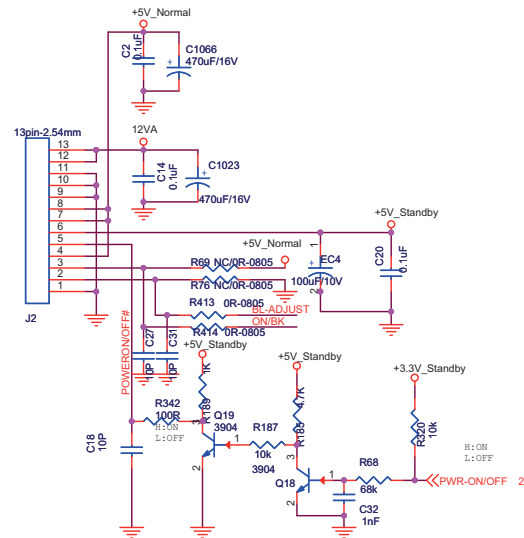


Inverter Interface

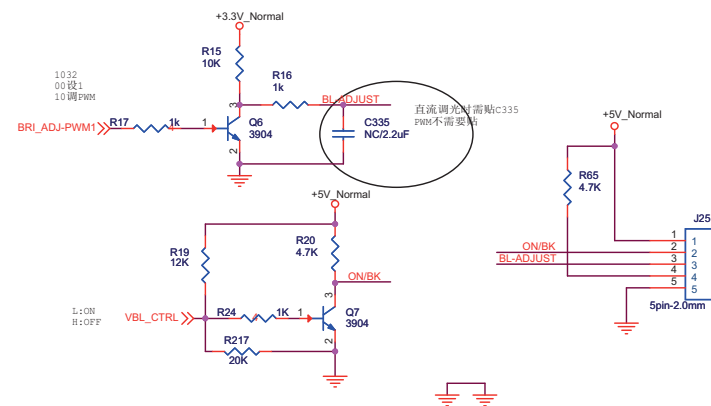


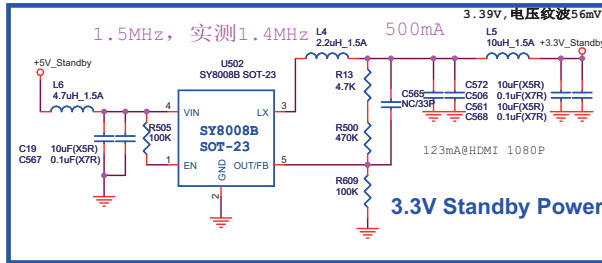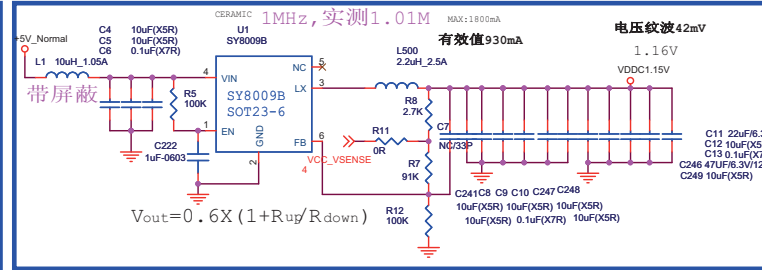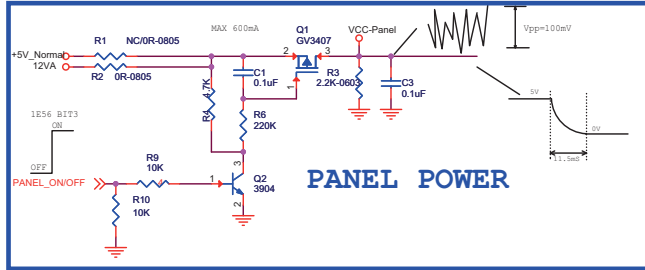


1.5V Normal Power for DDR3

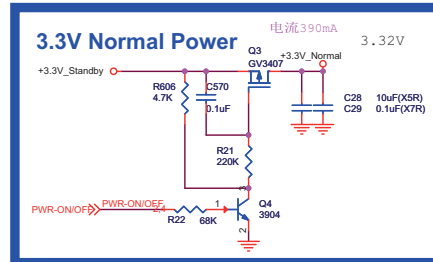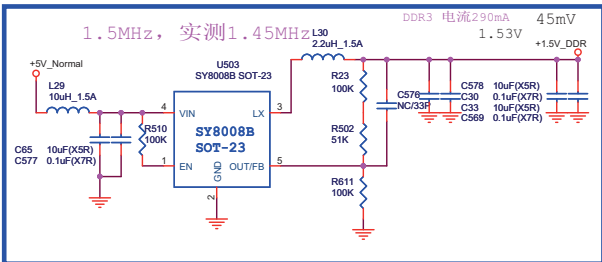


RGB & CVBS & USB

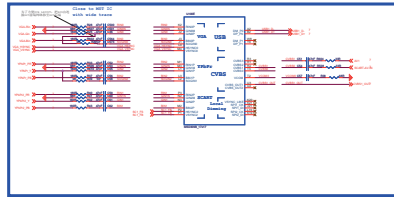


CI & TS & Front End

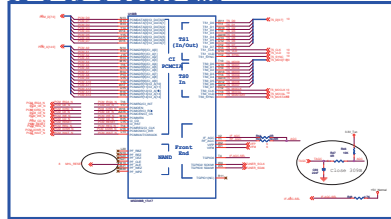


Power interface

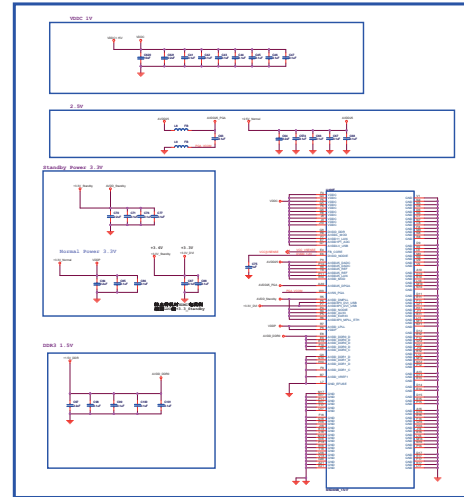


HDMI & Audio

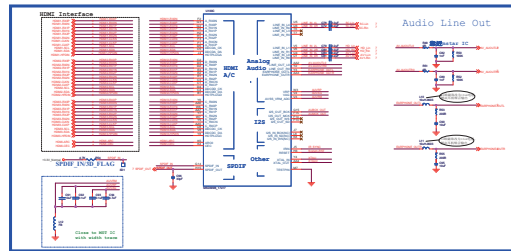


GPIO & LVDS





FLASH




LED




Mode Selection




RESET









KEYBOARD




System XTAL



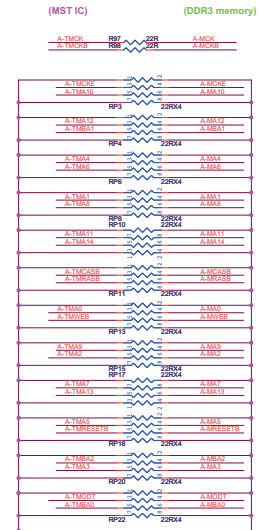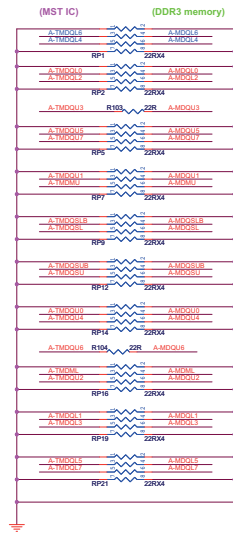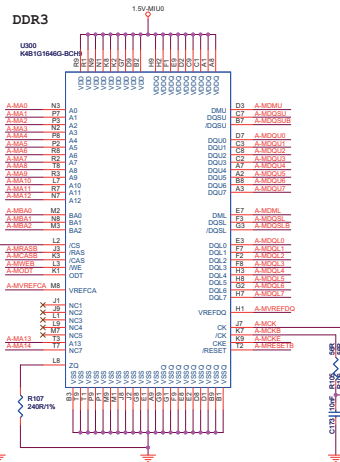

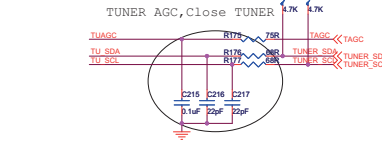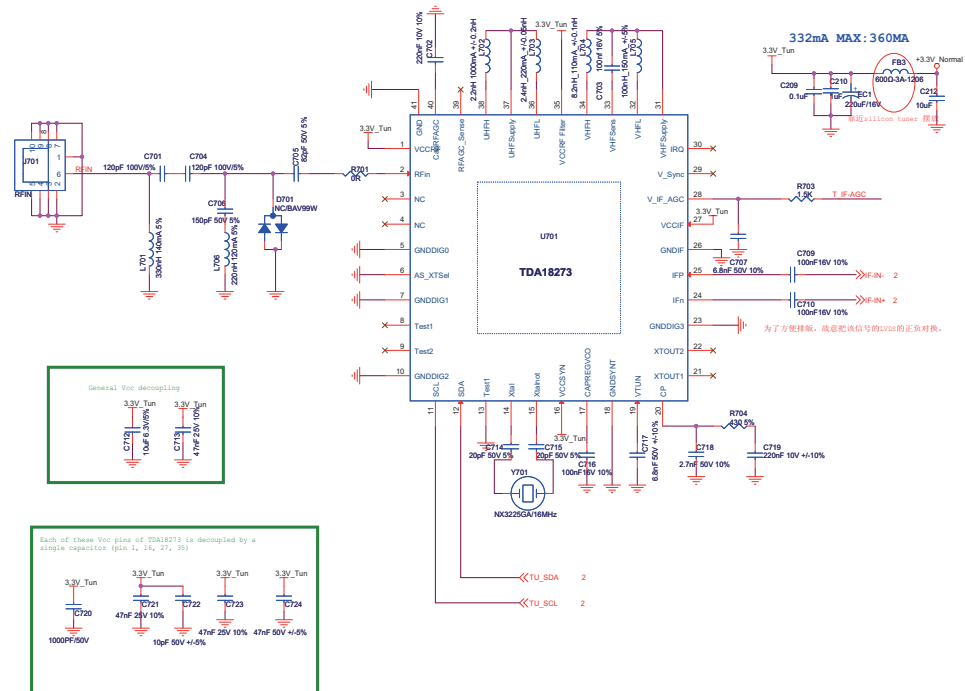

IF AGC Switch

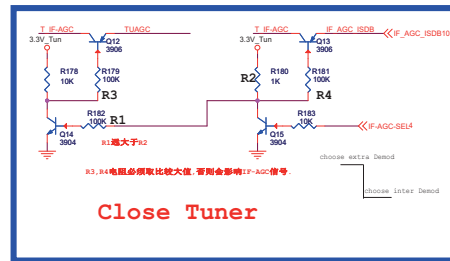


Close Tuner


General Vcc decoupling

Each of these Vcc pins of TDA18273 is decoupled by a single capacitor (pin 1, 14, 27, 35)


CN800
S2_TUNER

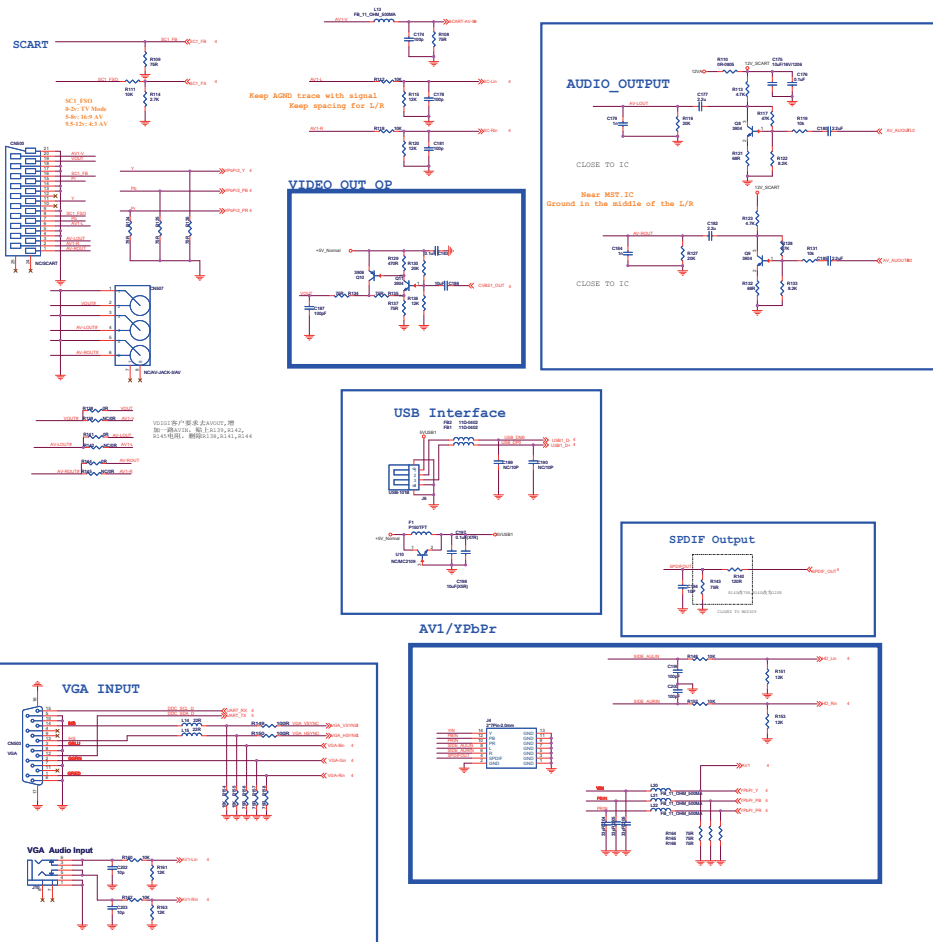


HDMI2/MHL

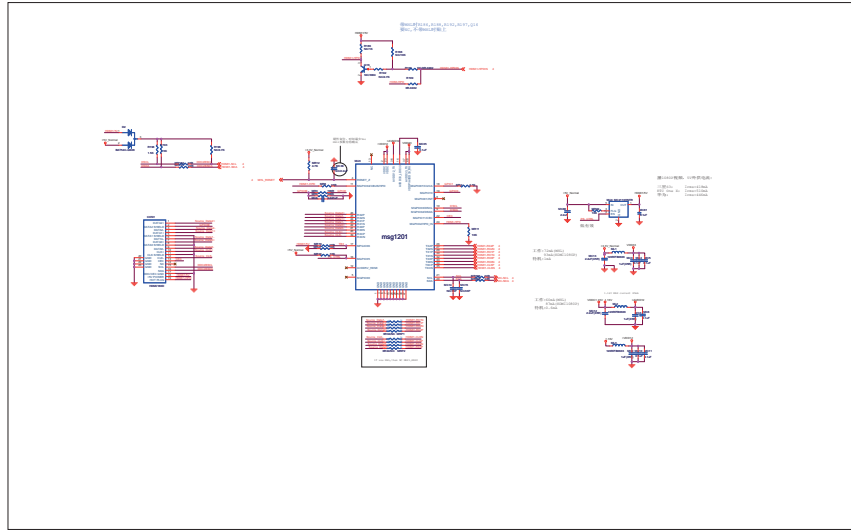

HDMI 3





HDMI 1






CEC & ARC






C238, C239, C250, C254
由10PF改为1000PF


EARPHONE OUT

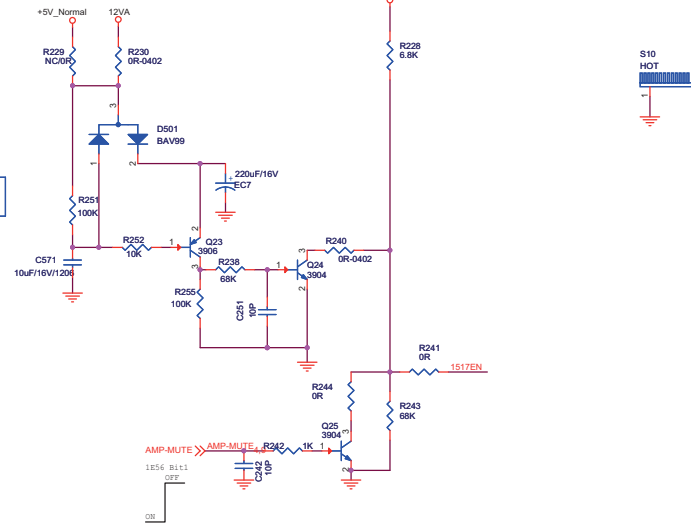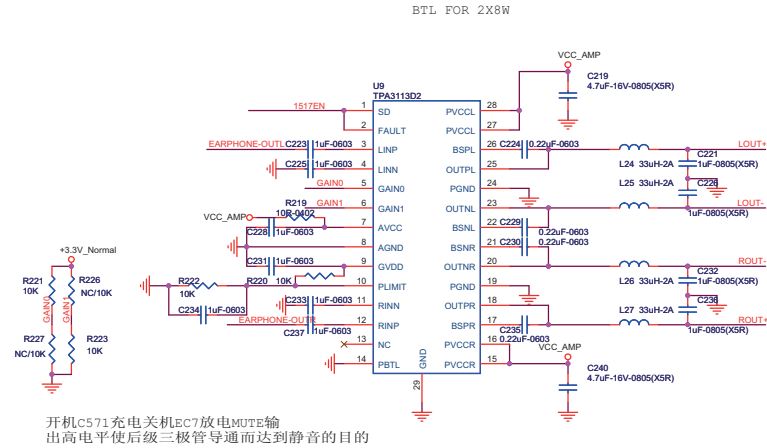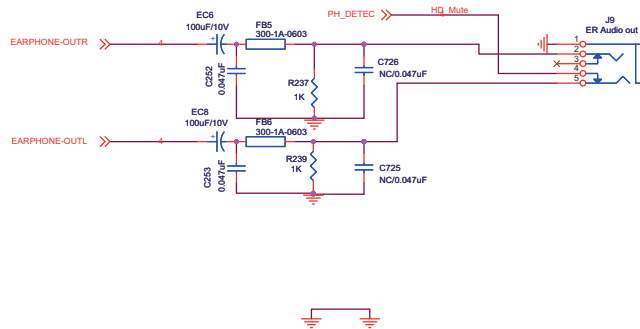


PCMCIA

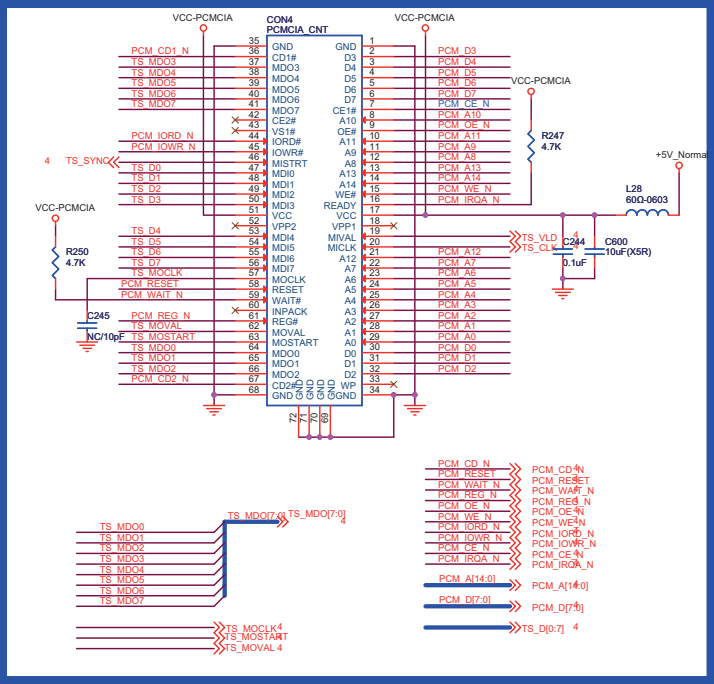

CARD DETECT

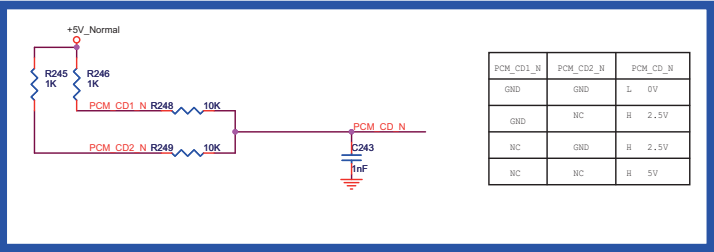


DEMO SOCK

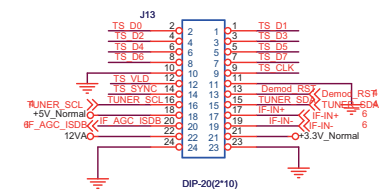


TS_CLK:7.2MHz


TS_SYNC:38KHz

only for 39"/46"

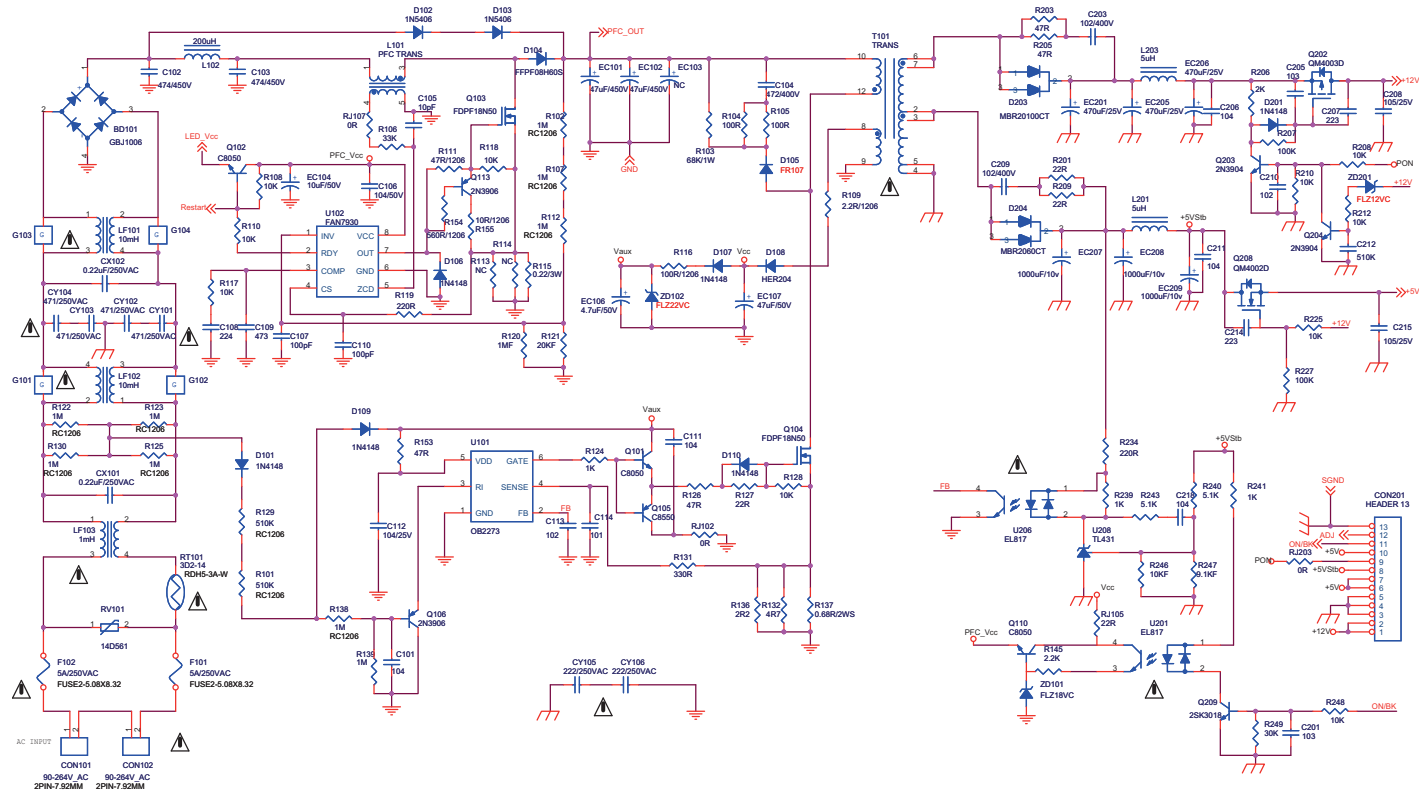

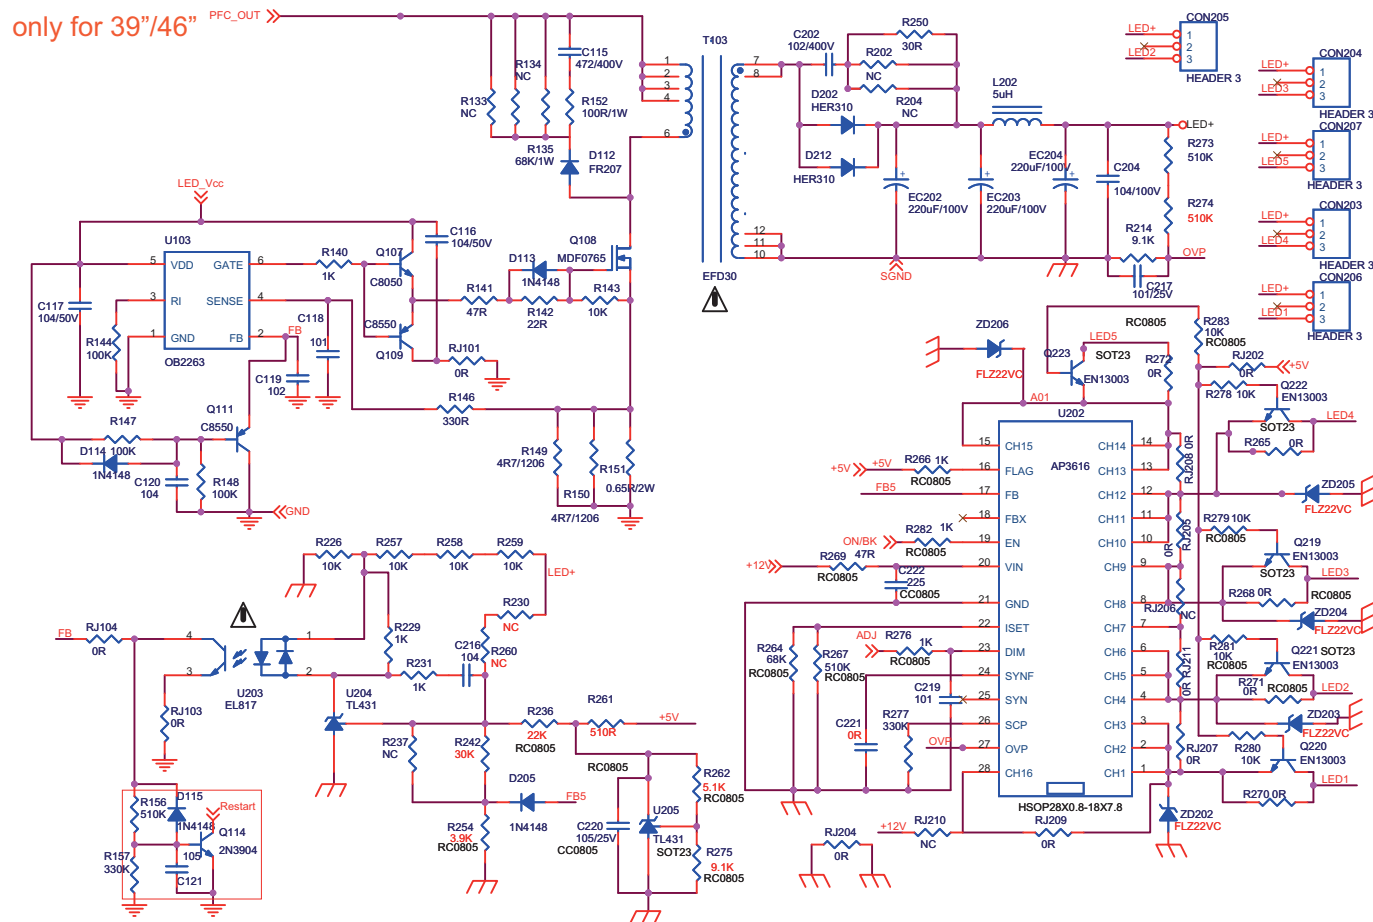

only for 50"

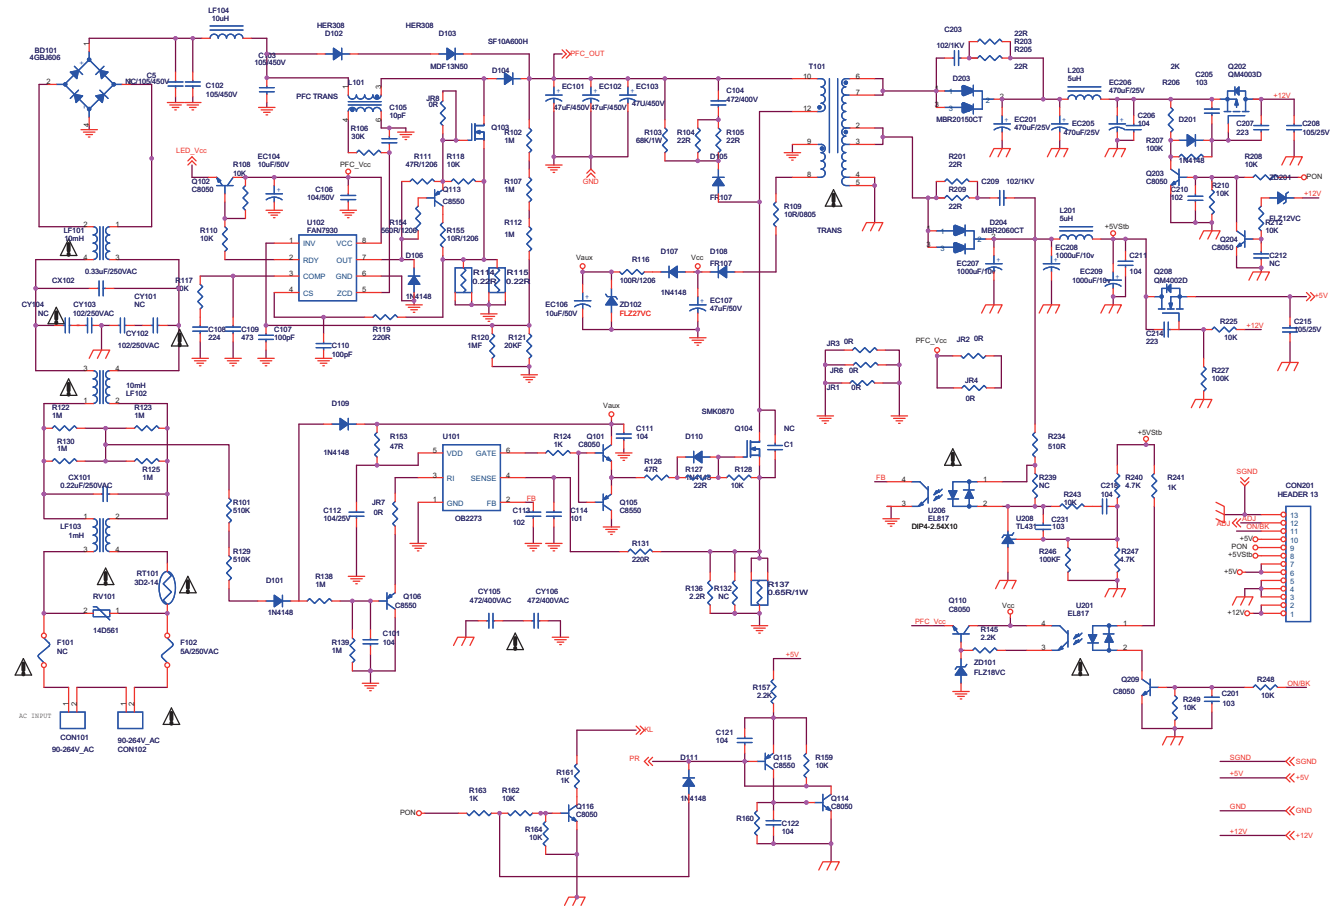

only for 50"

